CLAIM AMENDMENTS

1-74. (canceled)

75. (currently amended): A component A proton-conducting membrane designed to serve as an electrolyte in a fuel cell, which component comprises membrane consists essentially of a single metal or metal hydride support, wherein

one or both faces of said support is coated with an electronically-insulating proton-conducting coating, which coating consists of an inorganic material that contains no liquid phase, said coating having a thickness such that the area-specific resistance for protons is in the range of $0.01\text{-}100\ \Omega.\text{cm}^2$ at at least one temperature between 220°C and 550°C.

- 76. (previously presented): The component of claim 75, wherein the metal or the metal contained in the metal hydride is palladium, titanium, silver, copper, vanadium, lanthanum, nickel, iron, chromium or alloys thereof.
- 77. (previously presented): The component of claim 76, wherein the metal or metal in the metal hydride is selected from the group consisting of Pd, PdAg, PdCu, Ti, LaNi₅, TiFe and CrV₂, V/Ni/Ti, V/Ni and V/Ti.
- 78. (previously presented): The component of claim 75, wherein the EIPC coating is selected from the group consisting of:

```
mesoporous zirconium phosphate pyrophosphate, Zr(P_2O_7)_{0.81};
```

Ba₃Ca_{1.18}Nb_{1.82}O_{8.73}-H₂O;

 $Cs_5H_3(SO_4)_4.0.5H_2O;$

a hydrate of SnCl₂;

silver iodide tetratungstate Ag₂₆I₁₈W₄O₁₆;

KH₂PO₄;

tetraammonium dihydrogen triselenate, (NH₄)₄H₂(SeO₄)₃;

2

CsDSO₄;

CsH₂PO₄;

 $Sr[Zr_{0.9}Y_{0.1}]O_{3-\delta};$

a silica-polyphosphate composite containing ammonium ions;

 $La_{0.9}Sr_{0.1}Sc_{0.9}Mg_{0.1}O_3$; and

BaCe_{0.9-x}Zr_x $M_{0.1}O_{3-\delta}$ where M is Gd or Nd and x = 0 to 0.4.

79. (previously presented): The component of claim 75, wherein the electronically-insulating proton-conducting coating consists of

 $Ba_3Ca_{1.18}Nb_{1.82}O_{8.73}-H_2O;$

CsH₂PO₄;

 $Sr[Zr_{0.9}Y_{0.1}]O_{3-\delta};$

polyphosphate composite containing 19.96 wt% NH₄⁺, 29.3 wt% P, 1.51 wt% Si;

 $La_{0.9}Sr_{0.1}Sc_{0.9}Mg_{0.1}O_3$; or

BaCe_{0.9-x}Zr_xM_{0.1}O_{3- δ} where M is Gd or Nd and x = 0 to 0.4.

- 80. (previously presented): The component of claim 75, wherein the thickness of the metal or metal hydride is $5-1,000 \mu m$.
- 81. (previously presented): The component of claim 80, wherein the thickness of the metal or metal hydride is $10\text{-}200~\mu m$.
- 82. (previously presented): The component of claim 75, wherein the area-specific resistance for protons at at least one temperature between 220°C and 550°C is about 0.150 Ω .cm².
 - 83. (canceled)

84. (currently amended): A component A proton-conducting membrane designed to serve as an electrolyte in a fuel cell, which component comprises membrane consists essentially of a single metal or metal hydride support, wherein

one or both faces of said support is coated with an electronically-insulating proton-conducting coating, which coating consists of an inorganic material that contains no liquid phase, said coating having a thickness such that the ASR for protons at at least one temperature between 220°C and 550°C is in the range shown for Nafion® 117 in Figure 10:

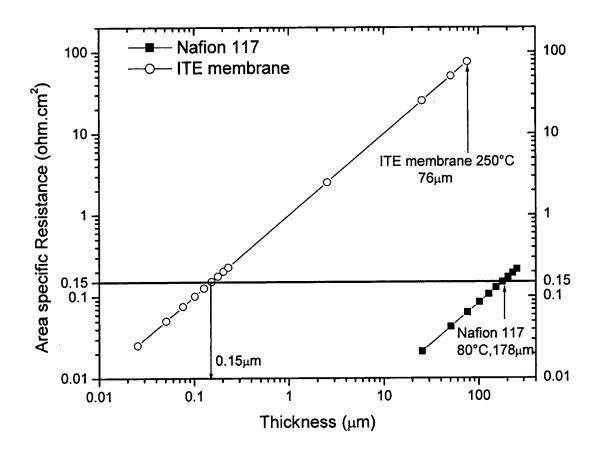


Figure 10.

85. (previously presented): The component of claim 84, wherein the metal or the metal contained in the metal hydride is palladium, titanium, silver, copper, vanadium, lanthanum, nickel, iron, chromium or alloys thereof.

- 86. (previously presented): The component of claim 85, wherein the metal or metal in the metal hydride is selected from the group consisting of Pd, PdAg, PdCu, Ti, LaNi₅, TiFe and CrV₂, V/Ni/Ti, V/Ni and V/Ti.
- 87. (previously presented): The component of claim 84, wherein the electronically-insulating proton-conducting coating is selected from the group consisting of:

mesoporous zirconium phosphate pyrophosphate, Zr(P₂O₇)_{0.81};

Ba₃Ca_{1,18}Nb_{1,82}O_{8,73}-H₂O;

 $Cs_5H_3(SO_4)_4.0.5H_2O;$

a hydrate of SnCl₂;

silver iodide tetratungstate Ag₂₆I₁₈W₄O₁₆;

KH₂PO₄;

tetraammonium dihydrogen triselenate, (NH₄)₄H₂(SeO₄)₃;

CsDSO₄;

CsH₂PO₄;

 $Sr[Zr_{0.9}Y_{0.1}]O_{3-\delta};$

a silica-polyphosphate composite containing ammonium ions;

 $La_{0.9}Sr_{0.1}Sc_{0.9}Mg_{0.1}O_3$; and

BaCe_{0.9-x}Zr_x $M_{0.1}O_{3-\delta}$ where M is Gd or Nd and x = 0 to 0.4.

88. (previously presented): The component of claim 84, wherein the electronically-insulating proton-conducting coating consists of

 $Ba_3Ca_{1.18}Nb_{1.82}O_{8.73}-H_2O;$

CsH₂PO₄;

 $Sr[Zr_{0.9}Y_{0.1}]O_{3-\delta};$

polyphosphate composite containing19.96 wt% NH₄⁺, 29.3 wt% P, 1.51 wt% Si;

 $La_{0.9}Sr_{0.1}Sc_{0.9}Mg_{0.1}O_3$; or

BaCe_{0.9-x} $Zr_xM_{0.1}O_{3-\delta}$ where M is Gd or Nd and x = 0 to 0.4.

- 89. (previously presented): The component of claim 84, wherein the thickness of the metal or metal hydride is $5-1,000 \mu m$.
- 90. (previously presented): The component of claim 89, wherein the thickness of the metal or metal hydride is $10\text{-}200~\mu m$.
- 91. (previously presented): The component of claim 84, wherein the area-specific resistance for protons at at least one temperature between 220°C and 550°C is about 0.150 Ω .cm².
 - 92. (canceled)